



Efficiently Moving Grain

GRAIN BAG UNLOADER

For 9 or 10 ft Grain Bags

EXG380X



www.akronag.com



Efficiently Moving Grain

- Newly designed rear transmission features upper and lower angular gearboxes connected by a driveline.
- The cross auger guards are free from structural obstacles to ensure a better grain flow.
- Low-maintenance machine.
- **Bottom Angular Gearbox.** It simplifies the augers performance and ensures an optimized way of ending the bag.
- **Independent Hydraulic Controls.**
- **Hydrostatic Movement.** The machine moves automatically as the bag is wound up by the roller. It has speed adjustment system and a sturdy reduction gearbox.
- **Tires:** 235/70R16.
- **Electrostatic Polyurethane Paint.**
- **Hydraulic Movable Spout** (optional).
- **Led Running Lights** (optional).




Hydraulic Movable Spout.



Led Running Lights.

Great Capacity!!! 360 tonnes/hour

**It fully winds up the grain bag.
Automatic movement independent
of the tractor traction.**

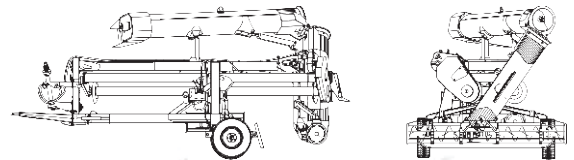

Transport position

For bags of	9 feet (with option to 10 feet)
Unloading performance	360 tonnes/hour
Power required	90 HP
Tube / Auger diameter	430 mm / 17 in
Horizontal Auger diameter	250 mm / 10 in

EXG380X



Humboldt, Sk
Canada
Phone 1 - 306 - 682 - 5888

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.



Bottom Angular Gearbox.




Grain pusher pan improves "end of bag" clean up & performance in tough grain conditions.



Independent Hydraulic Controls. Speed Control Valve.



Robust roller transmission.



New transmission system.